

Siberian Branch of Russian Academy of Science
Budker Institute of Nuclear Physics

Antokhin E.A., Akberdin R.R., Arbuzov V.S., Bokov M.A.,
Bolotin V.P., Burenkov D.B., Bushuev A.A., Veremeenko V.F.,
Vinokurov N.A., Vobly P.D., Gavrilov N.G., Gorniker E.I.,
Gorchakov K.M., Grigoryev V.N., Gudkov B.A., Davydov A.V.,
Deichuli O.I., Demytyev E.N., Dovzhenko B.A., Dubrovin A.N.,
Evtushenko Yu.A., Zagorodnikov E.I., Zaigraeva N.S., Erokhin A.I.,
Kairan D.A., Kiselev O.B., Knyazev B.A., Kozak V.R.,
Kolmogorov V.V., Kolobanov E.I., Kondakov A.A., Kondakova N.L.,
Krutikhin S.A., Kryuchkov A.M., Kubarev V.V., Kulipanov G.N.,
Kuper E.A., Kuptsov I.V., Kurkin G.Ya., Labutskaya E.A.,
Leontyevskaya L.G., Loskutov V.Yu., Matveenko A.N.,
Medvedev L.E., Medvedko A.S., Miginsky S.V., Mironenko L.A.,
Motygin S.V., Oreshkov A.D., Ovchar V.K., Osipov V.N.,
Persov B.Z., Petrov S.R., Petrov V.M., Pilan A.M., Poletaev I.V.,
Polyansky A.V., Popik V.M., Popov A.M., Rotov E.A.,
Salikova T.V., Sedlyarov I.K., Selivanov P.A., Serednyakov S.S.,
Skrinsky A.N., Tararyshkin S.V., Timoshina L.A., Tribendis A.G.,
Kholopov M.A., Cherepanov V.P., Shevchenko O.A., Shteinke A.R.,
Shubin E.I., Scheglov M.A.

FIRST EXPERIMENTAL RESULTS
AT THE HIGH POWER
FREE ELECTRON LASER
AT SIBERIAN CENTER
FOR PHOTOCHEMISTRY RESEARCH

Budker INP 2003-53

Novosibirsk
2003

First experimental results at the high power free electron laser at Siberian Center for Photochemistry Research

*Antokhin E.A., Akberdin R.R., Arbutov V.S., Bokov M.A., Bolotin V.P.,
Burenkov D.B., Bushuev A.A., Veremeenko V.F., Vinokurov N.A., Vobly P.D.,
Gavrilov N.G., Gorniker E.I., Gorchakov K.M., Grigoryev V.N., Gudkov B.A.,
Davydov A.V., Deichuli O.I., Demytyev E.N., Dovzhenko B.A., Dubrovin A.N.,
Evtushenko Yu.A., Zagorodnikov E.I., Zaigraeva N.S., Erokhin A.I., Kairan D.A.,
Kiselev O.B., Knyazev B.A., Kozak V.R., Kolmogorov V.V., Kolobanov E.I.,
Kondakov A.A., Kondakova N.L., Krutikhin S.A., Kryuchkov A.M., Kubarev V.V.,
Kulipanov G.N., Kuper E.A., Kuptsov I.V., Kurkin G.Ya., Labutskaya E.A.,
Leontyevskaya L.G., Loskutov V.Yu., Matveenko A.N., Medvedev L.E., Medvedko A.S.,
Miginsky S.V., Mironenko L.A., Motygin S.V., Oreshkov A.D., Ovchar V.K.,
Osipov V.N., Persov B.Z., Petrov S.R., Petrov V.M., Pilan A.M., Poletaev I.V.,
Polyansky A.V., Popik V.M., Popov A.M., Rotov E.A., Salikova T.V.,
Sedlyarov I.K., Selivanov P.A., Serednyakov S.S., Skrinsky A.N., Tararyshkin S.V.,
Timoshina L.A., Tribendis A.G., Kholopov M.A., Cherepanov V.P.,
Shevchenko O.A., Shteinke A.R., Shubin E.I., Scheglov M.*

Abstract

The first lasing near $\lambda=140$ micrometer was achieved in April 2003 on a high power free electron laser (FEL) constructed at the Siberian Center for Photochemical Research. In this paper we briefly describe design of the FEL driven by an accelerator–recuperator. Characteristics of the electron beam and terahertz laser radiation, obtained at the first experiments, are also presented in the paper.

**Первые результаты работы мощного лазера
на свободных электронах
Сибирского центра фотохимических исследований**

*Антохин Е.А., Акбердин Р.Р., Арбузов В.С., Боков М.А., Болотин В.П.,
Буренков Д.Б., Буцуев А.А., Веремеенко В.Ф., Винокуров Н.А., Воблый П.Д.,
Гаврилов Н.Г., Горникер Э.И., Горчаков К.М., Григорьев В.Н., Гудков Б.А.,
Давыдов А.В., Дейчули О.И., Дементьев Е.Н., Довженко Б.А., Дубровин А.Н.,
Евтушенко Ю.А., Загородников Е.И., Заиграева Н.С., Ерохин А.И., Кайран Д.А.,
Киселев О.Б., Козак В.Р., Колмогоров В.В., Колобанов Е.И., Кондаков А.А.,
Кондакова Н.Л., Крутихин С.А., Крючков А.М., Кубарев В.В., Кулипанов Г.Н.,
Купер Э.А., Купцов И.В., Куркин Г.Я., Лабуцкая Е.А., Леонтьевская Л.Г.,
Лоскутов В.Ю., Матвеев А.Н., Медведев Л.Э., Медведев А.С., Мизинский С.В.,
Мироненко Л.А., Мотыгин С.В., Орешков А.Д., Овчар В.К., Оситов В.Н.,
Персов Б.З., Петров С.Р., Петров В.М., Пилан А.М., Полетаев И.В.,
Полянский А.В., Попик В.М., Попов А.М., Ротов Е.А., Саликова Т.В.,
Седяров И.К., Селиванов П.А., Серядняков С.С., Скрябинский А.Н.,
Тарарышкин С.В., Тимошина Л.А., Трибендис А.Г., Холопов М.А.,
Черепанов В.П., Шевченко О.А., Штейнке А.Р., Шубин Е.И., Щеглов М.А.*

Аннотация

В Сибирском центре фотохимических исследований весной 2003 года получена генерация излучения с длиной волны 140 мкм на мощном лазере на свободных электронах (ЛСЭ). В работе кратко описана конструкция ЛСЭ на базе ускорителя рекуператора и представлены результаты измерения некоторых параметров электронного пучка и терагерцового излучения.

1. Introduction

A new source of terahertz radiation was commissioned recently in Novosibirsk. It is CW FEL based on an accelerator–recuperator, or an energy recovery linac. The terahertz FEL is the first stage of a bigger installation, which will be built in three years and will provide shorter wavelengths and higher power. The facility will be available for users in 2004. The first radiation study results are discussed in this paper

2. Accelerator – recuperator

Full-scale Novosibirsk free electron laser is to be based on multi-orbit 50 MeV electron accelerator-recuperator. It is to generate radiation in the range from 3 micrometer to 0.3 mm [1, 2]. The first stage of the machine contains a full-scale RF system, but has only one orbit. Layout of the accelerator–recuperator is shown in Fig. 1. The 2 MeV electron beam from an injector passes through the accelerating structure, acquiring 12 MeV energy, and comes to the FEL, installed in the straight section. After interaction with radiation in the FEL the beam passes once more through the accelerating structure, returning the power, and comes to the beam dump at the injection energy. Main parameters of the accelerator are listed in Table 1.

Table 1: Accelerator parameters (the first stage)

RF wavelength, m	1.66
Number of RF cavities	16
Amplitude of accelerating voltage at one cavity, MV	0.7
Injection energy, MeV	2
Final electron energy, MeV	12
Bunch repetition rate, MHz	1.4 – 22.5
Average current, mA	2 – 40
Beam emittance, mm mrad	1
Final electron energy spread, %	1
Final electron bunch length, ns	0.02 – 0.1
Final peak electron current, A	40 – 10

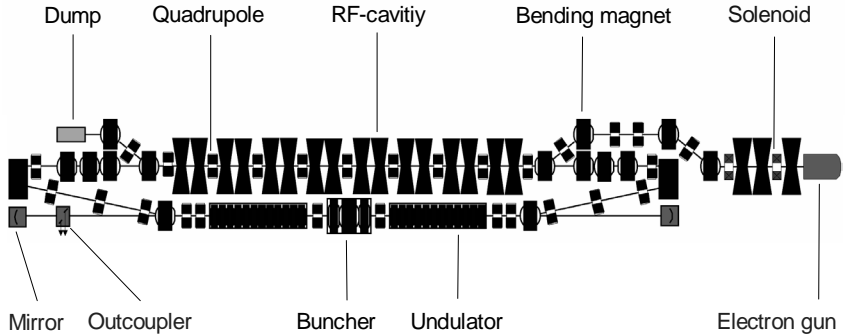


Fig. 1. Scheme of the first stage of Novosibirsk high power free electron laser.

The FEL is installed in a long straight section of a single-orbit accelerator-recuperator. It consists of two undulators, a magnetic buncher, two mirrors of the optical resonator, and an outcoupling system. Both electromagnetic planar undulators are identical. The length of an undulator is 4 m, period is 120 mm, the gap is 80 mm, and deflection parameter K is up to 1.2. One can use one or both undulators with or without a magnetic buncher. The buncher is simply a three-pole electromagnetic wiggler. It is necessary to optimize the relative phasing of undulators. Both laser resonator mirrors are identical, spherical, 15 m curvature radius, made of gold plated copper, and water-cooled. In the center of each mirror there is a 3.5 mm diameter hole. It serves for mirror alignment (using He-Ne laser beam) and output of small amount of radiation. The distance between mirrors is 26.6 m. The outcoupling system contains four adjustable planar 45° copper mirrors (scrapers). These mirrors cut the tails of Gaussian eigenmode of the optical resonator and redirect radiation to calorimeters. This scheme preserves the main mode of optical resonator well and reduces amplification of higher modes effectively.

3. FEL commissioning

For FEL commissioning we used both undulators. Beam average current was typically 5 mA at repetition rate 5.6 MHz, which is the round-trip frequency of the optical resonator and 32-th subharmonics of the RF frequency. Most of measurements were performed without scrapers recording radiation flux from one of the mirror apertures. Instead of fine tuning of the optical resonator length we tuned the RF frequency (180 MHz). The tuning curve is shown in Fig. 2.

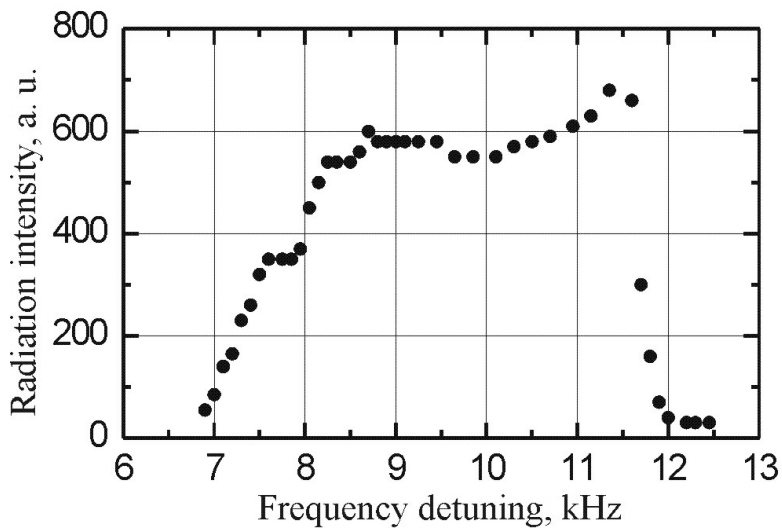


Figure 2. Laser intensity vs RF frequency detuning ($f\theta - 180400$ kHz).

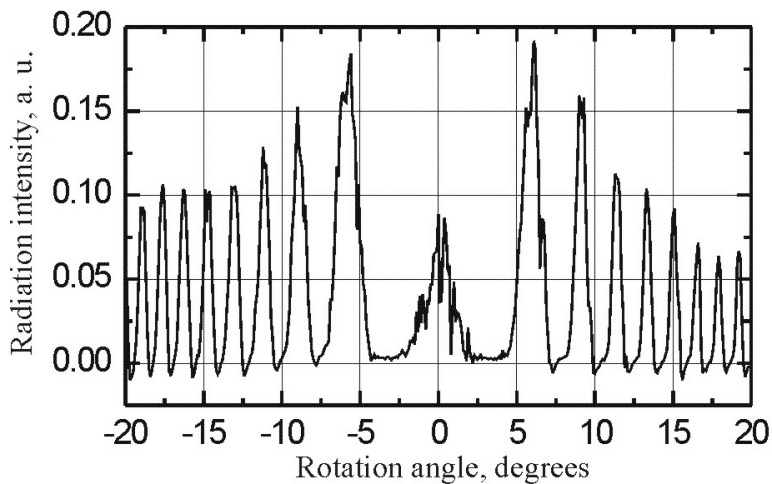


Figure 3. Results of the Fabri-Perot interferometer rotation angle scanning (laser wavelength $\lambda = 136\mu\text{m}$).

Typical results of spectrum measurement with rotating Fabri-Perot interferometer [3] are shown in Fig. 3. They were used to find both wavelength and linewidth of radiation. Radiation wavelengths were in the range 120 – 180 micrometers depending on the undulator field amplitude. The shortest wavelength is limited by the gain decrease at a low undulator field, and the longest one – by the optical resonator diffraction loss increase. Relative linewidth (FWHM) was near $3 \cdot 10^{-3}$. The corresponding coherence length $\lambda^2/2\Delta\lambda = 2$ cm is close to the electron bunch length, therefore we, probably, achieved the Fourier-transform limit.

The loss of the optical resonator was measured with a fast Schottky diode detector [4]. Its typical output is the pulse sequence with 5.6 MHz repetition rate. Switching off the electron beam, we measured the decay time (see Fig. 4). The typical round-trip loss value was near 5 – 8%.

The FEL oscillation was obtained not only at $f_0 = 5.6$ MHz bunch repetition rate, but at $f_0/2$, $f_0/3$, $f_0/4$ and $2 \cdot f_0/3$. The time dependence of intensity at bunch repetition rate $f_0/4$ is shown in Fig. 5. Radiation decay time (and therefore resonator loss) can also be measured from this dependence. The dependence of power on inverse loss is shown in Fig. 6. For example, operation at bunch repetition rate $f_0/4$ corresponds to four time more loss per one amplification. It indicates that our maximum gain is about 30%.

The absolute power measurements were performed in two ways. First we measured the power coming through the hole in the mirror without scrapers. Output coupling is very weak in this case, so the power was about 10 W. It corresponds to intra-cavity average power near 2 kW. Another measurements were performed with two (right and left) scrapers inserted. The insertion depth was chosen to decrease intra-cavity power twice. The measured power in each calorimeter was 20 W. Taking into account other resonator loss one can estimate the total power loss as $2 \cdot (20+20)+0.07 \cdot P_* \approx 150$ W, where $P_* \approx 1$ kW is the intra-cavity power with scrapers inserted. The electron beam power was 50 kW. Therefore an electron efficiency is about 0.3%. The possible explanation of so low value is too long undulator and high electron energy spread. Attempts to get oscillation with one undulator switched off are in progress. Possible way for decreasing of the energy spread – the installation of a 3rd harmonic (540 MHz) cavity – is under examination.

4. Further development

A beamline for transport radiation out of the accelerator hall to the user station rooms is under construction. The first experimental station is designed. The facility is to start operation for users in 2004. Expected radiation parameters for users are shown in Table 2.

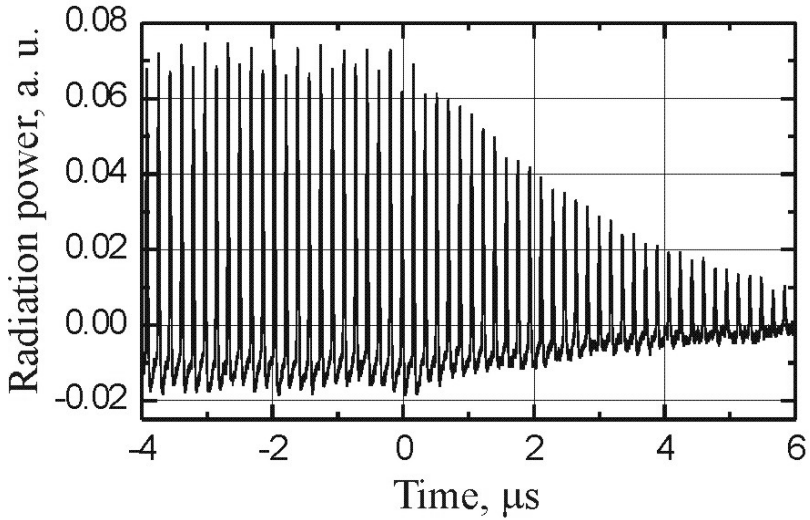


Figure 4. Time history of the output radiation power after switching the electron beam off.

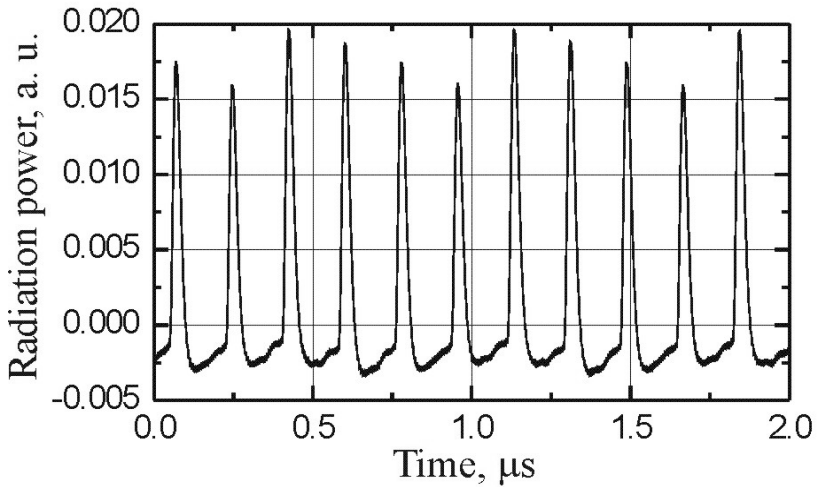


Figure 5. The output radiation time dependence; electron bunch repetition rate 1.4 MHz is four time less then the optical resonator round-trip frequency 5.6 MHz.

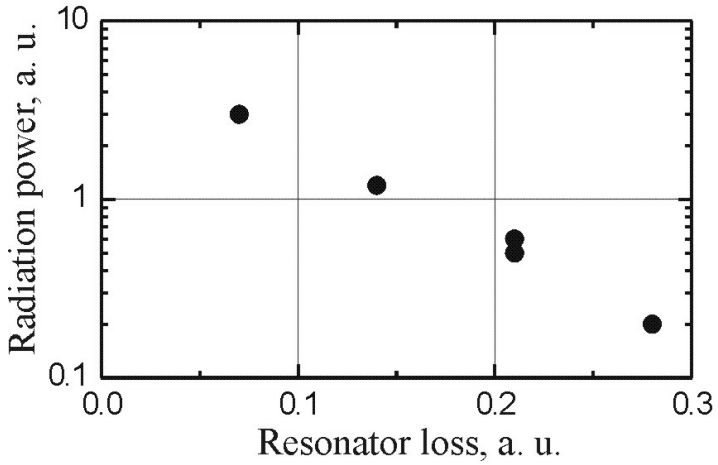


Figure 6. Average intra-cavity power vs loss per one amplification.

Table 2: Expected radiation parameters for users

Wavelength, mm	0.11...0.18
Pulse length, ns	0.1
Peak power, MW	0.1
Maximum repetition rate, MHz	5.6...22.5
Average power, W	100

REFERENCES

- [1] *N.G. Gavrilov, E.I. Gorniker, G.N. Kulipanov, I.V. Kuptsov, G. Ya. Kurkin, A.D. Oreshkov, V.M. Petrov, I.V. Pinayev, I.K. Sedlyarov, A.N. Skrinsky, A.S. Sokolov, V.G. Veshcherevich, N.A. Vinokurov, P.D. Vobly.* IEEE J. Quantum Electron., QE-27, p.2626-2628, 1991.
- [2] *V.P.Bolotin, N.G. Gavrilov, D.A. Kairan, M.A. Kholopov, E.I. Kolobanov, V.V. Kubarev, G.N. Kulipanov, S.V. Miginsky, L.A. Mironenko, A.D. Oreshkov, V.M. Popik, T.V. Salikova, M.A. Sheglov, O. A. Shevchenko, A.N. Skrinsky, N.A. Vinokurov, P.D. Vobly.* Proc. of FEL-2000, Durham, USA, p. II-37 (2000).
- [3] *V.V. Kubarev.* Proc. of FEL-2003, Tsukuba, Japan, 2003.
- [4] *V.V. Kubarev, G. M. Kazakevich, Y. V. Jeong, B. C. Lee.* Nucl. Instr. Meth. A, V. 507, p.523-526, 2003.

Antokhin E.A., Akberdin R.R., Arbutov V.S., Bokov M.A., Bolotin V.P., Burenkov D.B., Bushuev A.A., Veremeenko V.F., Vinokurov N.A., Vobly P.D., Gavrilov N.G., Gorniker E.I., Gorchakov K.M., Grigoryev V.N., Gudkov B.A., Davydov A.V., Deichuli O.I., Dementyev E.N., Dovzhenko B.A., Dubrovin A.N., Evtushenko Yu.A., Zagorodnikov E.I., Zaigraeva N.S., Erokhin A.I., Kairan D.A., Kiselev O.B., Knyazev B.A., Kozak V.R., Kolmogorov V.V., Kolobanov E.I., Kondakov A.A., Kondakova N.L., Krutikhin S.A., Kryuchkov A.M., Kubarev V.V., Kulipanov G.N., Kuper E.A., Kuptsov I.V., Kurkin G.Ya., Labutskaya E.A., Leontyevskaya L.G., Loskutov V.Yu., Matveenko A.N., Medvedev L.E., Medvedko A.S., Miginsky S.V., Mironenko L.A., Motygin S.V., Oreshkov A.D., Ovchar V.K., Osipov V.N., Persov B.Z., Petrov S.R., Petrov V.M., Pilan A.M., Poletaev I.V., Polyansky A.V., Popik V.M., Popov A.M., Rotov E.A., Salikova T.V., Sedlyarov I.K., Selivanov P.A., Serednyakov S.S., Skrinisky A.N., Tararyshkin S.V., Timoshina L.A., Tribendis A.G., Kholopov M.A., Cherepanov V.P., Shevchenko O.A., Shteinke A.R., Shubin E.I., Scheglov M.

**First experimental results at the high power free electron laser
at Siberian Center for Photochemistry Research**

Антохин Е.А., Акбердин Р.Р., Арбузов В.С., Боков М.А., Болотин В.П., Буренков Д.Б., Бушуев А.А., Веремеенко В.Ф., Винокуров Н.А., Вобль П.Д., Гаврилов Н.Г., Горникер Э.И., Горчаков К.М., Григорьев В.Н., Гудков Б.А., Давыдов А.В., Дейчули О.И., Дементьев Е.Н., Довженко Б.А., Дубровин А.Н., Евтушенко Ю.А., Загородников Е.И., Заиграева Н.С., Ерохин А.И., Кайран Д.А., Киселев О.Б., Козак В.Р., Колмогоров В.В., Колобанов Е.И., Кондаков А.А., Кондакова Н.Л., Крутихин С.А., Крючков А.М., Кубарев В.В., Кулипанов Г.Н., Купер Э.А., Куцзов И.В., Куркин Г.Я., Лабуцкая Е.А., Леонтьевская Л.Г., Лоскутов В.Ю., Матвеенко А.Н., Медведев Л.Э., Медведко А.С., Мигинский С.В., Мироненко Л.А., Мотыгин С.В., Орешков А.Д., Овчар В.К., Осипов В.Н., Персов Б.З., Петров С.Р., Петров В.М., Пилан А.М., Поletaев И.В., Полянский А.В., Попик В.М., Попов А.М., Ротов Е.А., Саликова Т.В., Седляров И.К., Селиванов П.А., Серядняков С.С., Скринский А.Н., Тарарышкин С.В., Тимошина Л.А., Трибендис А.Г., Холопов М.А., Черепанов В.П., Шевченко О.А., Штейнке А.Р., Шубин Е.И., Щеглов М.А.

**Первые результаты работы мощного лазера
на свободных электронах
Сибирского центра фотохимических исследований**

Budker INP 2003-53

Ответственный за выпуск А.М. Кудрявцев

Работа поступила 15.08. 2003 г.

Сдано в набор 22.08. 2003 г.

Подписано в печать 25.08.2003 г.

Формат 60x90 1/16 Объем 0.7 печ.л., 0.6 уч.-изд.л.

Тираж 225 экз. Бесплатно. Заказ № 53

Обработано на IBM PC и отпечатано
на ротапринтере ИЯФ им. Г.И. Будкера СО РАН,
Новосибирск., 630090, пр. Академика Лаврентьева, 11